



# Technical Data

**RYMAR CHAMELEON WOOD COATING** is an oil modified water base acrylic urethane designed to completely disappear, leaving the wood looking as though there is nothing on it when it dries. It has no color, leaving it crystal clear; yet it protects against moisture, ultra violet light, dirt and stains. Chameleon is formulated for interior use on logs, timbers, doors, windows, around indoor hot tubs and pools. It may also be used exterior excluding direct sunlight or on horizontal surfaces. Chameleon gives you outdoor protection for your indoor project, naturally.

### Product Data:

**Restrictions:** Apply when air and surface temperature are above 60° F and below 85° F.

**Weight Per Gallon:** 8.57 pounds

**Solids by Weight:** 30.13

**VOC:** Under 200 G/L

**Paintable:** No

**Flashpoint:** N/A

**Type:** Clear

**Vehicle:** Water

**Finish:** Flat

**Containers:** 1 Gallon, 5 Gallon

**Coverage:** Approximately 400-450 square feet per gallon

**Dry Time:** Approximately 1/2 hour to touch, 24 hours to use, 30 days to full cure. All times are temperature and moisture dependent.

**Clean-Up:** Warm soap and water

**Application:** Nylon brush, foam pad applicator, sprayer (back brushing necessary) Tip Size .011-.013

**Reduction:** None

**Cure:** Air Dry

**Substrate:** Wood

**Shelf Life:** Approximately 2 years.

**With Anti-Microbial Nano Particle Technology**

**Recommended Uses:** Tongue and Groove ceilings—Pool Rooms—Interior doors—Bars—Restaurants—window trims— interior log homes - Many Other Wood Projects

### Features & Benefits



- **Nano Particle Technology** -We incorporate nano particle technology (a shield of superfine particles) to protect wood against abrasion, UV light, moisture and will help fight bacteria growth on the surface of the coating.



- **Sunseal Sunscreen**– We incorporate special UV absorbers and pigments to help block out any UV light from reaching the wood surface.



- **Citronella Oil**– A naturally occurring organic substance obtained from leaves of Asiatic lemon oil grass. Commonly used as a natural mosquito repellent.



- **Chew Stop**- Is a natural pepper additive that may help prevent animals from chewing on wood. It may also discourages bees, bugs, spiders, and birds—naturally.



- **Natural and Synthetic Oils**- A blend of Supreme linseed oil and synthetic oils allows for good penetration of the wood and still gives a surface build for greater protection of the substrate.



- **PTFE**– PTFE is used to both repel water and help protect against weather erosion.



- **Water and Dirt Repellent** With our proprietary Hydrosil additive you get unparalleled protection against both moisture and dirt, while allowing the wood to breathe. In order to help stabilize wood, you must keep out moisture. Along with the oils and PTFE you get superior protection which allows for easy cleaning of dirt buildup on wood.




## Technical Data

**DIRECTIONS:** Before doing your project, do a brush out to insure your satisfaction with the overall results. Wood should be clean and dry. Unseasoned wood should be allowed to dry to a moisture content of 12% to 15%. For better penetration and longer lasting protection, mill glaze should be removed by sanding and using Rymar Rinseable Soap. **DO NOT USE METAL PAILS OR HARD WATER.** Ask your dealer about preparing surfaces for coatings; they may be able to advise you otherwise, depending on your situation. **Clears will not stop graying as well as pigmented sealers and will break down sooner.** Chameleon is not recommended for exterior surfaces. Apply coating with a nylon brush or sprayer, do not shake before using; stir only. Brush with even strokes in one direction, if possible, with a high quality nylon brush. Apply 1 or 2 coats to your project for best results being careful to avoid runs, drips or over-spray. If more than one coat is applied, you can lightly sand the first coat for a smoother finish. Two or three coats is recommended, especially around windows, doors and exterior use. Chameleon is not recommended for floors. One coat of Chameleon will dry to a flat finish in about 1/2 hour. With each additional coat, you may get a slight bit of shine. Chameleon can be applied over a wiping stain if a color is desired, however, the stain may affect the no finish look. Again, try a brushout before doing your entire project. Reapplication can be done in about 1/2 hour or when dry to the touch.

**Warranty:** Rymar warrants that the contents of this can are not defective. In the event this product fails to comply with the warranty, it is Rymar LLC's option to furnish replacement of product or a refund of the purchase price with proof of purchase. In the event of product failure and/or misuse of this product, Rymar and its affiliates assume no responsibility (implied or otherwise), for labor, substrate, other items or materials used in either the application of this product or otherwise.

**\*NOTE!** Do a test: Try a brush out on your project to ensure the color and product is what you want before doing your entire project.

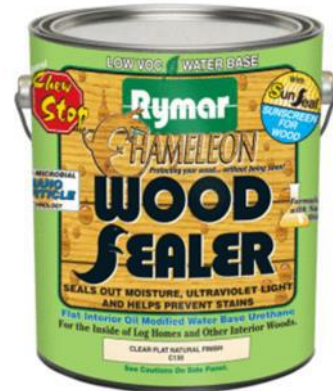

6620 N CTH J - CATO - WI - 54230

[www.rymarindustries.com](http://www.rymarindustries.com)

Email: [rymar@rymarindustries.com](mailto:rymar@rymarindustries.com)

Call: 920-732-3909